


### St. James Components


- |                   |                           |
|-------------------|---------------------------|
| 1 Top shoe        | 9 Base rail 4"            |
| 2 Rail cap        | 10 Base shoe              |
| 3 Top rail        |                           |
| 4 St. James panel | Not shown in application: |
| 5 Stile           | Top/Base rail 6"          |
| 6 End trim        | Top/Base rail 8"          |
| 7 Inside corner   |                           |
| 8 Outside corner  |                           |

### St. James Wainscot Paneling Standard Specifications


- Class A fire-rated system
- Rigid panels .04" thick with vertical grooves every 3"
- Panels to have vertically oriented wood grain pattern, with panel width up to 48"
- End trim units are 3" wide x 3/4" thick
- Optional base and top rails are 3/4" thick x 4", 6" or 8" high x 12' long with horizontal grooves
- Optional vertical stiles are 3" wide x 1/2" thick
- Optional base shoe and top shoe (hollow Kwalu polymer) are 1 3/8" high x 3/4" deep x 12' long
- Optional rail caps are 2 1/2" high x 1/2" thick x 8' long
- Inside corners factory assembled with 2" legs (face dimension)
- Outside corners factory assembled with 3" legs (face dimension)




1 Top shoe  
10 Base shoe  
(Hollow Kwalu Polymer)




2 Rail cap




3 Top rail 4"  
9 Base rail 4"

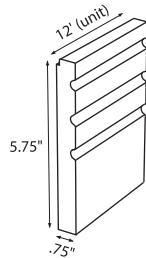


Top rail 6"  
Base rail 6"

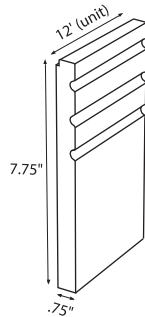


Top rail 8"  
Base rail 8"

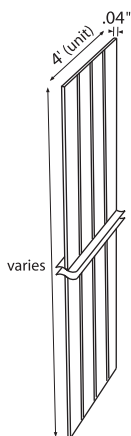


4 St. James panel



5 Stile



6 End trim

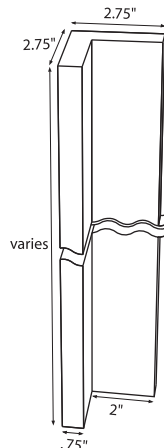

7 Inside corner  
8 Outside corner

### Options

- Install using standard woodworking tools and Loctite Power Grab adhesive, in strict accordance with manufacturer's instructions
- Select all system options, including:
  - overall system height
  - spacing between vertical stiles from 12" to 48"
  - include or exclude base rail or top rail
  - select base and top rail height – 4", 6" or 8"
  - include or exclude rail cap, base shoe or top shoe (both shoes are recommended to cover inconsistencies in wall and floor surfaces)
- Choose from multiple standard wood grain patterns

Face dimensions of horizontal and vertical components are stated in nominal terms. Actual face dimensions of finished end trims, corners, stiles, rail caps, top rails and base rails are 1/4" less than the above-stated nominal dimensions.



Virtually Indestructible™

1-877-MY-KWALU (695-9258)

kwalu.com